



T U N E D F O R Y O U R S O U L

www.dragsteraudio.it

OWNER'S MANUEL

DWQ-12


DWQ-15
SUBWOOFER



SPECIFICATIONS

Features	UNIT	DWQ-12D2	DWQ-12D4	DWQ-15D2	DWQ-15D4
Overall Dimension :	mm	326X203	326X203	396X222	396X222
RMS Power :	Watts	1500	1500	1500	1500
MAX Power :	Watts	3000	3000	3000	3000
Nominal Impedance :	Ohm	2+2	4+4	2+2	4+4
DC Resistance :	Ohm	1.8 + 1.8	3.8 + 3.8	1.8 + 1.8	3.8 + 3.8
Sensitivity :	dB	84	83	86	85
Frequency Response :	Hz	20-200	20-200	20-200	20-200
Cone Material :		Non-Pressed Paper	Non-Pressed Paper	Non-Pressed Paper	Non-Pressed Paper
Voice Coil Diameter :	inch	Dual 3" PCW	Dual 3" PCW	Dual 3" PCW	Dual 3" PCW
Voice Coil Height :	mm	45	45	45	45
Voice Coil Bobbin :		BASV	BASV	BASV	BASV
Voice Coil Wire :		COPPER	COPPER	COPPER	COPPER
Number of Layers :	Layers	4	4	4	4
QMS :		5.81	6.15	5.99	6.33
QES :		0.53	0.52	0.54	0.58
QTS :		0.48	0.48	0.49	0.53
VAS :		33.4L	33.4L	76.3L	79.7L
MMS :		345.8 g	391.7 g	451.8 g	468.2 g
FS :		27.4 Hz	25.6 Hz	25.5 Hz	24.4 Hz
Magnet Weight :		FERITTE	FERITTE	FERITTE	FERITTE
XMAX One Way :		20mm	20mm	20mm	20mm
Displacement :		3.1 L	3.1 L	4.1 L	4.1 L

Dimensions

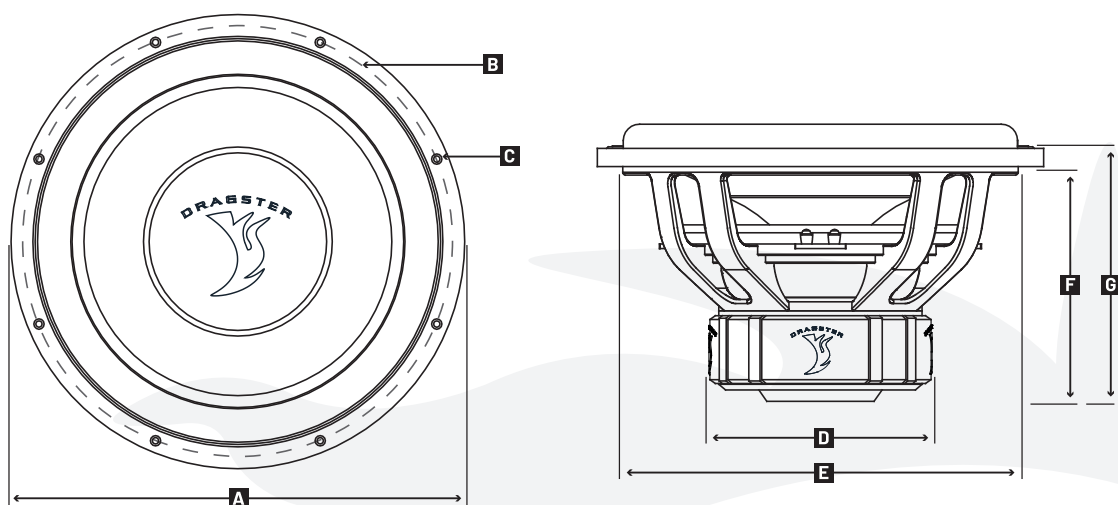

MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
DWQ-12D1	326	303	6	202	285	187	203
DWQ-12D2	326	303	6	202	285	187	203
DWQ-15D1	396	375	6	202	350	206	222
DWQ-15D2	396	375	6	202	350	206	222