



DWL15D2/D4

15" SUBWOOFER

Features:

Heavy guage stamped basket;
Kevlar fiber reinforced non-press paper cone
Red stitched EROM foam surround;
2.5" 4-layer round copper wire voice coil;
Reliable red poly-cotton 2-pc spiders;
Double stacked 120oz Strontium magnets;
Direct VC cooling motor design;
Push terminal;
Rubber magnet boot and rubber gasket;
DVC2 or DVC4-ohm Impedance;
600W RMS power and 1200W MAX power

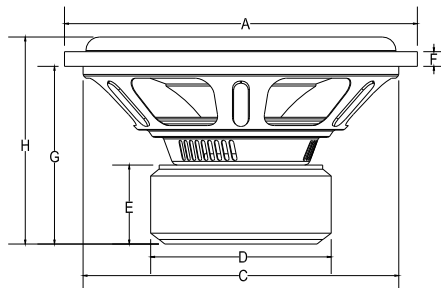

DWL15D2/D4 DIMENSIONS			
Diameter A	mm	395	395
Diameter B	mm	372	372
Diameter C	mm	359	359
Diameter D	mm	162	162
Depth E	mm	70	70
Depth F	mm	15	15
Depth G	mm	181	181
Depth H	mm	205	205

DWL15D2/D4 subwoofer T/S Parameters

	Imp	Dcr	Fs	SD	BL	Qms	Qes	Qts	n	SPLo	Vas	Cms	Mms	Mmd	Xmax	Vd
Model	ohm	ohm	Hz	msqM	Tm					dB	L	µm/N	g	g	±mm	L
DWL15D2	1	0.9	31.0	80.43	9.71	4.414	0.475	0.429	0.513	89.1	84.21	91.68	286.74	273.62	14.0	5.55
DWL15D2	4	3.6	31.3	80.43	21.07	3.718	0.443	0.396	0.571	89.6	85.54	93.13	278.08	264.96	14.0	5.55
DWL15D4	2	1.7	33.3	80.43	12.26	4.214	0.637	0.553	0.436	88.4	78.10	85.03	269.42	256.30	14.0	5.55
DWL15D4	8	6.8	33.5	80.43	24.98	4.236	0.600	0.526	0.479	88.8	79.21	86.24	261.88	248.76	14.0	5.55

*Above parameters are tested after each subwoofer was break-ined under 600W power for 8hours.

*Due to continuous pursuit of performance, specifications change without prior notice.