




We know what speaker need

THD vs bridged power @ 4Ohms/13.8V- Distorsion @ 4Ohms/13.8V

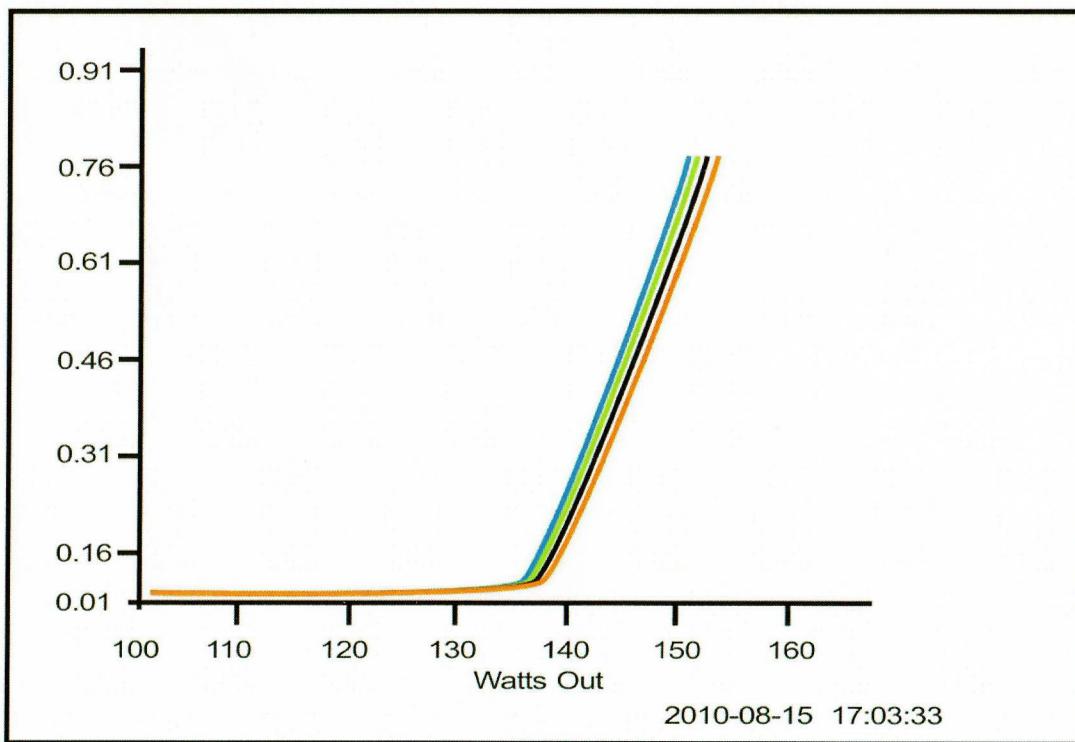

RMS power at 4 Ohms
Puissance RMS sous 4Ohms

135 WATT

DA-4

The following specs are met during pre test and final test:
Les specifications suivantes sont validees durant les phases de

RMS power/channel@4Ohms/13.8V
Puissance RMS par canal sous 4Ohms/13.8V 135W

Total Harmonic Distortion 20kHz
Distorsion harmonique totale 20Hz-20kHz 0.03%

Signal to noise ratio
Rapport signal/bruit > 100dB(A)

Damping factor@4Ohms
Facteur d amortissement sous 4Ohms > 250

Slew rate
Vitesse de balayage > 20V/us

Pass technician
Validation du technicien

