




*We know what speaker need*

THD vs bridged power @ 4ohms/13.8V- Distorsion @ 4Ohms/13.8V

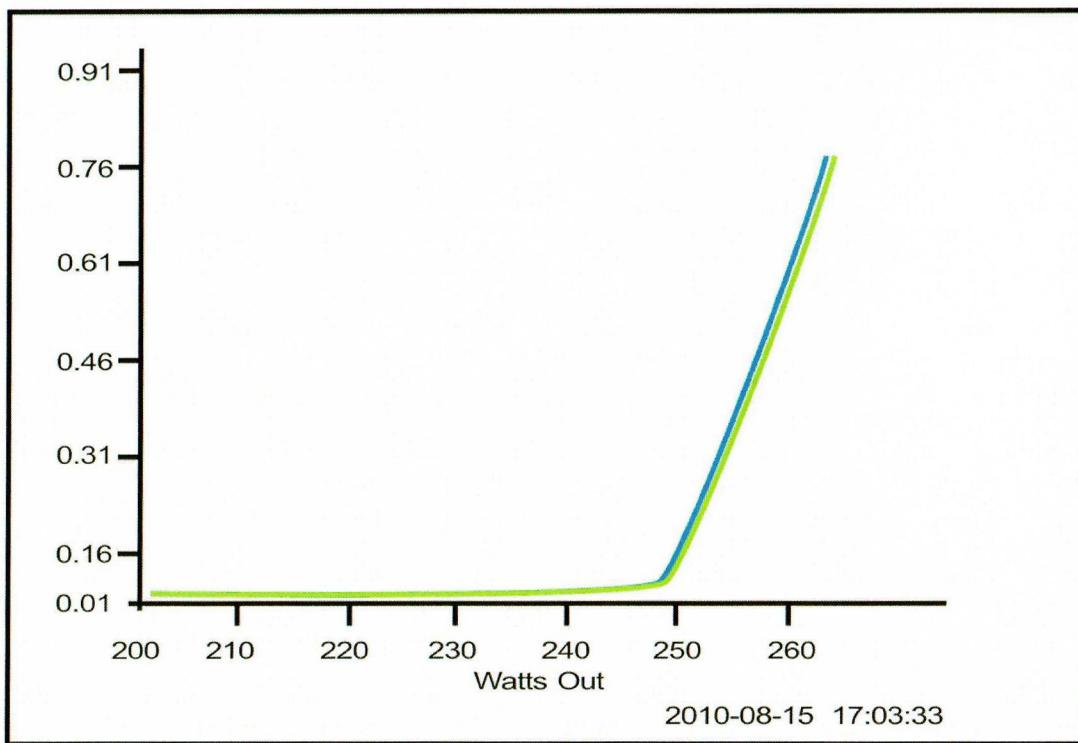

RMS power at 4 Ohms  
Puissance RMS sous 4Ohms

252 WATT

## DA-2

The following specs are met during pre test and final test:  
Les specifications suivantes sont validees durant les phases de

RMS power/channel@4Ohms/13.8V  
Puissance RMS par canal sous 4Ohms/13.8V 250W

Total Harmonic Distortion 20kHz  
Distorsion harmonique totale 20Hz-20kHz 0.03%

Signal to noise ratio  
Rapport signal/bruit > 100dB(A)

Damping factor@4Ohms  
Facteur d'amortissement sous 4Ohms > 450

Slew rate  
Vitesse de balayage > 20V/us

Pass technician  
Validation du technicien

