




OWNER MANUAL

ATW-25CNC

TWEETER



Type	: Tweeter		
Power (RMS)	: 20W		
Power (MAX	: 40W		
Nominal Impedance	: 4 Ω±15% at 210 HZ. 1.0V DCR : 4.4Ω		
Frequency Response	: 1500-20.000K Hz		
Sensitivity	: 87±2 dB at PST from 1W/1M		
Magnet: Neodymium	Size: 27*3.5	Grade: N52	Weight: 0.4 Oz
Voice Coil: 28.1φ(mm)	Layers: 2(L)	Winding Length: 1.5(mm)	Former Material: ASV/CCAW
Frame Material: Aluminum			

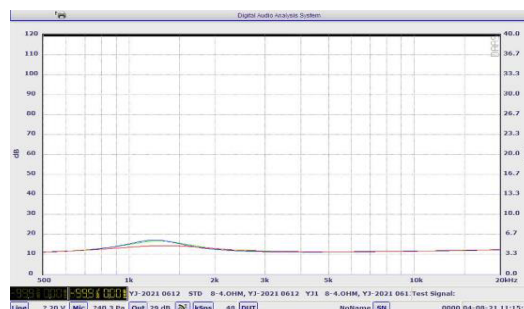



OWNER MANUAL

ATW-25CNC

TWEETER

