

academy




D R A G S T E R

OWNER MANUAL

AMW-65CNC MIDBASS SPEAKER



Size	: 6.5"		
Power (RMS)	: 50W		
Power (MAX)	: 100W		
Nominal Impedance	: 3 Ω±15% at 210 HZ. 1.0V DCR : 3.0Ω		
Frequency Response	: 65-7.000K Hz		
Sensitivity	: 89±2 dB at PST from 1W/1M		
Magnet: Feritte	Size: 90*40*15	Grade: Y35	Weight: 13.70z
Voice Coil: 30.5φ(mm)	Layers: 2(L)	Winding Length: 13.6(mm)	Former Material: ASV/2L
Frame Material: Aluminum			
QMS: 3.84	QES: 0.59	QTS: 0.51	VAS: 12.3L
BL: 5.2	MMS: 13.0		

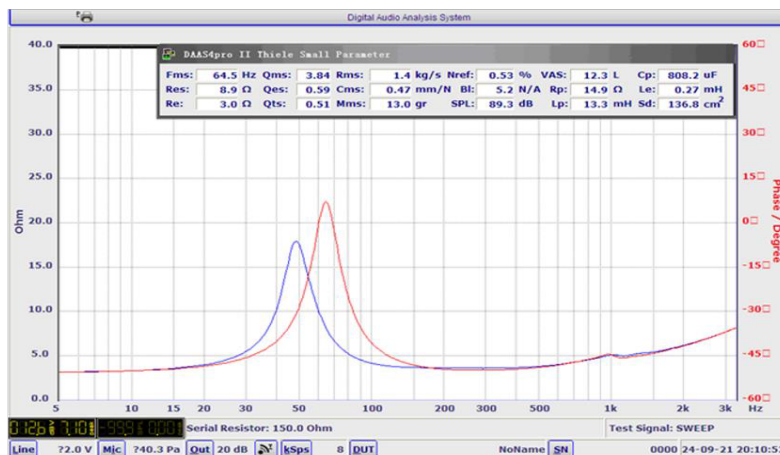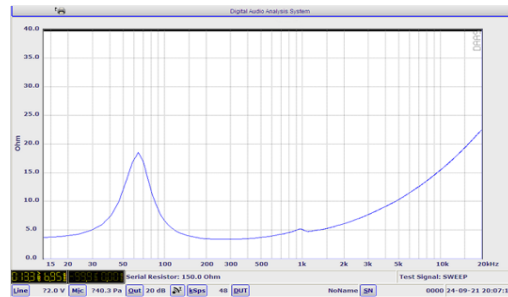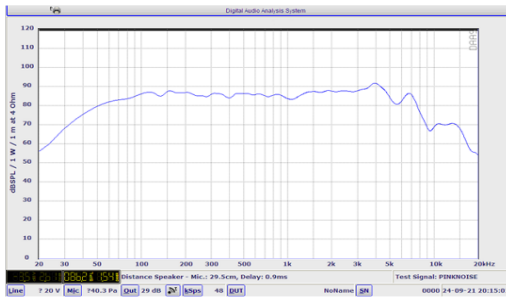

AMW-65CNC

MIDBASS SPEAKER

